


Aluminum Small Body Compression Adjustable Twin-Tube



Precise & Repeatable

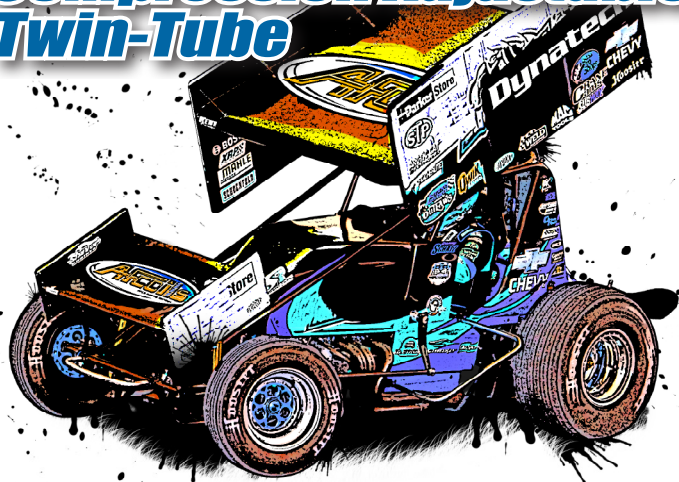

The adjusters on these shocks are specifically designed to make fast, precise, and repeatable changes. The knobs are 100% o-ring sealed from the elements and easy to grasp, even with muddy, greasy, or gloved hands. The easy-to-feel, spring-loaded detents allow you to quickly **make an adjustment with a simple click.**

• Compression adjustments will not affect rebound

All adjustment settings are determined by the number of "clicks" from a lightly closed position (knob turned fully clockwise but not overly tight).

3 - 5 COMPRESSION

COMPRESSION

VALVING	COMPRESSION CLICKS	1" FORCE VALUES	3" FORCE VALUES	6" FORCE VALUES	10" FORCE VALUES
5	0	35	85	120	160
4.5	20	25	70	110	150
4	25	20	60	100	140
3	30	17	45	75	130

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

4 - 6 COMPRESSION

COMPRESSION

VALVING	COMPRESSION CLICKS	1" FORCE VALUES	3" FORCE VALUES	6" FORCE VALUES	10" FORCE VALUES
6	0	55	135	175	220
5.5	20	35	110	160	200
5	25	30	85	150	190
4	FULL OPEN	20	60	120	170

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

Get your copy of the NEW AFco/Dynatech Master Catalog featuring over 30 pages of Shocks & detailed chassis tuning guides!



Optional Shock Bumpers



Soft Bumper
2.25" - **223527**
3" - **223541**



Medium Bumper
2.25" - **223533**
3" - **223550**




Hard Bumper
2.25" - **223539**
3" - **223559**



www.AFCOracing.com
800-632-2320

Aluminum Small Body Rebound Adjustable Twin-Tube

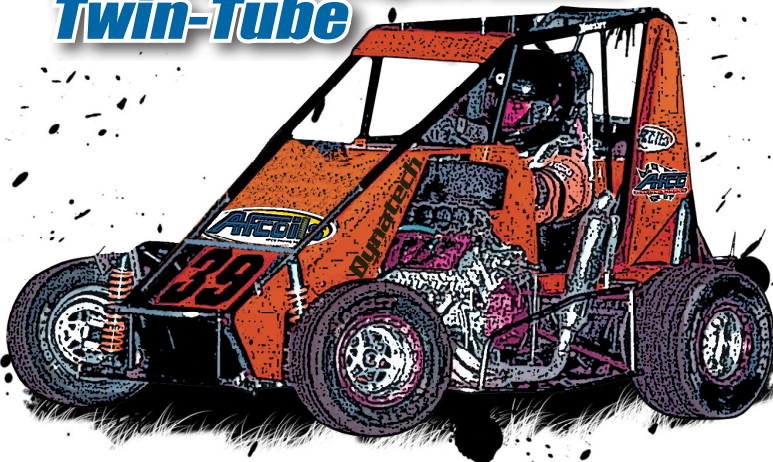

Precise & Repeatable



Rod End Rebound Knob

The adjusters on these shocks are specifically designed to make fast, precise, and repeatable changes. The knobs are 100% o-ring sealed from the elements and easy to grasp, even with muddy, greasy, or gloved hands. The easy-to-feel, spring-loaded detents allow you to quickly **make an adjustment with a simple click.**

- Rebound adjustments will not affect compression

All adjustment settings are determined by the number of "clicks" from a lightly closed position (knob turned fully clockwise but not overly tight).

2 - 5 REBOUND

REBOUND

VALVING	REBOUND CLICKS	1" FORCE VALUES	3" FORCE VALUES
5	FULL CLOSED	41	111
4.5	-15	30	91
4	-19	21	76
3	-23	15	54
2	-27	11	31
1.5	FULL OPEN	10	26

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

5 - 10 REBOUND

REBOUND

VALVING	REBOUND CLICKS	1" FORCE VALUES	3" FORCE VALUES
10	0	343	390
9.5	4	321	373
9	6	260	366
8.5	10	145	351
8	13	70	307
7.5	17	36	239
7	19	31	200
6	23	22	137
5	27	17	94

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

4 - 8 REBOUND

REBOUND

VALVING	REBOUND CLICKS	1" FORCE VALUES	3" FORCE VALUES
8	FULL CLOSED	276	333
7.5	-10	201	271
7	-16	51	230
6	-25	25	165
5	-30	23	113
4	FULL OPEN	22	92

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

3 - 6 REBOUND

REBOUND

VALVING	REBOUND CLICKS	1" FORCE VALUES	3" FORCE VALUES
7	FULL CLOSED	138	173
6	-6	68	148
5.5	-9	48	139
5	-16	24	110
4	-22	19	72
3	FULL OPEN	16	54

NOTE: VALVING IS DETERMINED BY 3" FORCE VALUES.

SPRINGS


- 8" & 10" small body springs, rates from #50 - 400



Coil Over Nut with Locking Collar
55000021220



Coil Over Kit with Locking Collar
100096



www.AFCOracing.com

800-632-2320